


KG-245A Ancillaries – Models 7020, 7025, 7026

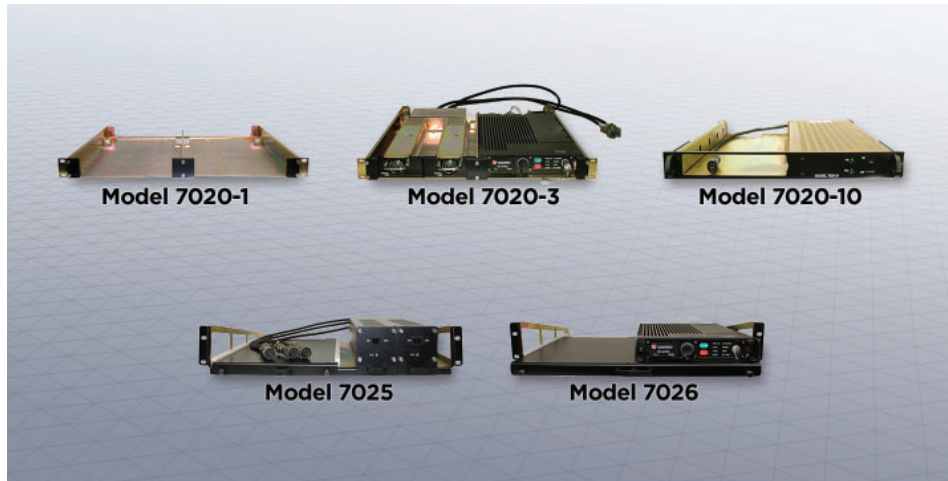

Model 7020-10 provides power and effortless slide rail access for installation and removal of one KG-245A encryption device. Model 7020-3 also provides power and mounting for up to three KG-245As (with optional 7020-1 daughter rack) and can be mounted in as little as 2 RU space. Model 7025 is designed to securely mount and power up to three KG-245As (with optional 7026 daughter rack) and is designed to operate in severe environmental conditions.

Key Features

- Mounts in a standard 19" EIA equipment rack
- Cable interfacing is made directly to the KG-245A
- Redundant, hot-swappable auto-ranging internal power supplies (Model 7025)
- Redundant auto-ranging internal power supplies (Model 7020-10)
- Powers up to three KG-245As (Models 7020-3/7020-1 and 7025/7026)
- Optional Dual AC and DC Inputs available (Model 7025)
- Optional Dual AC Inputs available (Model 7020-10)
- Optional Navy Shipboard Certified Unit available (Model 7025/7026)

Specifications

- Weight
 - 7020-1: 11.0 lbs.
 - 7020-3: 23.2 lbs.
 - 7020-10: 13.1 lbs.
 - 7025: 28.0 lbs.
 - 7026: 16.5 lbs.
- Dimensions
 - Height:
 - 7020-1/3: 1.719 in. (1RU)
 - 7020-10: 1.719 in. (1RU)
 - 7025/6: 3.469 in. (2RU)
 - Width:
 - 7020-1/3: 17.715 in.
 - 7020-10: 17.715 in.
 - 7025/6: 17.715 in.

- Depth:
 - 7020-1/3: 22.0 in.
 - 7020-10: 22.0 in. (with slides)
 - 7025/6: 19.0 in.
- Input Power
 - Model 7020-3
 - Voltage: 85-264VAC (Auto-ranging)
 - Frequency: 47-63 Hz
 - Power: <105 Watts total
 - Model 7020-10
 - Voltage: 90-264VAC (Auto-ranging)
 - Frequency: 47-63 Hz
 - Power: <35 Watts total
 - Model 7025
 - Voltage: 90-132/180-264VAC (Auto-ranging)
 - Frequency: 47-440 Hz
 - Power: <105 Watts total
- Temperature
 - Model 7020-3
 - Operating: 0°C to 70°C
 - Storage: -20°C to 85°C
 - Model 7020-10
 - Operating: 0°C to 70°C
 - Storage: -40°C to 85°C
 - Model 4045
 - Operating: -30°C to 85°C
 - Storage: -55°C to 100°C
- Warranty
 - 1 Year

AS 9001D CERTIFIED

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice at CACI's discretion. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

- AS 9100D with ISO 9001:2015
- IPC/WHMA-A-620 B
- ISO/IEC 20000
- CMMI® LEVEL 3

CACI provides information solutions and services in support of national security missions and government transformation for Intelligence, Defense, and Federal Civilian customers. CACI is a member of the *Fortune* 1000 Largest Companies, the Russell 2000 Index, and the S&P MidCap 400 Index. CACI's sustained commitment to ethics and integrity defines its corporate culture and drives its success. CACI provides dynamic career opportunities for military veterans and industry professionals to support the nation's most critical missions. Join us!

CACI Secure Solutions Department

46920 Bradley Blvd.
Lexington Park, MD 20653
Phone: (301) 737-3154
doug.moser@caci.com

www.caci.com

CACI
EVER VIGILANT

This material consists of CACI International Inc general capabilities information that does not contain controlled technical data as defined within the International Traffic in Arms Regulations (ITAR) Part 120.10 or Export Administration Regulations (EAR) Part 734.7-10. (9/18)

A *Fortune* World's Most Admired Company

INFORMATION DEPLOYED. SOLUTIONS ADVANCED. MISSIONS ACCOMPLISHED.